

# Dfuser Exhaust Brake III



## User Guide

This module utilizes the Engine Exhaust Back Pressure Valve (EBPV) in 1995-2003 7.3L F-250/F-350/F-450. The EBPV is a butterfly type valve located on the outlet of the turbocharger, between the turbine and the down pipe. It is controlled by the Power train Control Module (PCM, part of the emission system), and activated by engine oil pressure. Its purpose is to decrease engine warm up time in cold weather by restricting exhaust flow out of the engine.

The valve is a great way to assist in braking, and is most valuable to braking when engine speed is above 2000 RPM.

## Installation Instructions

### Pre-Cautions

- Take the time to read and understand these instructions. For further information please contact your distributor.
- Use proper tools when installing
- Use proper safety gear
- Please remove key from the ignition

### Tools recommended for installation

- 10mm socket, or wrench to ground wire under dash
- Flat screwdriver or coin Used to open dash cover
- Electrical Tape Used as protective covering on EBV connection
- Zip Ties and ¼" loom to clean up wiring runs and organize under the dash or under hood.
- Drill /drill bits for drilling hole (Use the locking nut on the toggle to determine the bit required)
- Pliers to crimp the 3M Scotchlok ® connectors.
- Crimper to crimp the butt connectors.

### Parts List

- Dfuser Exhaust Brake Module II-b
- 3M Scotchlok Connectors (qty = 3)
- Installation Instructions provided via email or web link (print copy is available upon request)

# Installation

## Notes:

- Examine the Exhaust Brake Module carefully. Start by identifying the wires that needs to be connected.

**Red Wire:** Connect wire to an ignition (+12V) source wire using the supplied 3M Scotchlok™ (Red) T-Tap Disconnect Terminal.

**Blue Wire:** Connect the Blue wire to the RD/GR wire (Red with Green stripe) on your throttle pedal and tap into it using the supplied 3M Scotchlok™ (Red) T-Tap Disconnect Terminal.

94-98: Use the Red wire or Red/Orange.

99-early 01: Have two separate connectors on the pedal assembly, and late 01-03 will have one.

Late 01-03: Have a single connector. IVS wire color is RD/GR (Red with Green stripe)

## Grey or White Harness:

- The EBPV wires are the Single long, Red/Green and Black/White in a Grey or White Housing. The Harness must be run through the access panel to the engine compartment, driver's side **(Picture)**.
- This is the hardest part of the install. Locate the wires that travel from the PCM to the EBPV. There should be a 2-wire plug just under the turbo compressor. It is located towards the back of the engine between the turbocharger and the Air Horn **(Picture)**. The plug is attached to the turbo pedestal, and is very hard to reach. Disconnect this plug by releasing the metal flip lock, and remove the loom (protective plastic shielding). Pull the connector toward the Fuel filter for easy access. Crimp two (2) 3M Scotchlok, one (1) inch apart to the Red with Green or Gray with Red depending on vehicle year **(Picture)**, and cut the wire between them **(Picture)**. The Red/Green wire connects closer to the EBPV side and the Black/White away from it (PCM side). Re-install plug back on EBPV.

Factory Harness	Exhaust Brake Module
Red w/Green or Gray w/Red Stripe PCM Side	Black/White
Red w/Green or Gray w/Red Stripe Plug/Turbo Side	Red/Green

## Module Box:

- Find a suitable place to mount the Module away from your feet.

## Black Wire:

- Connect to a good ground under the dash.


**Note: If you purchased the Plug'n'Play Pigtail: Connect the Green/Red to the Green wire on the Pigtail, and the Black/White to the Black wire on the Pigtail.**

## Operation

- Module will activate the Exhaust Valve on your vehicle every time you lift off the throttle pedal.
- It can be used all the time, except with cruise control. Use the supplied ON/Off switch to de-activate.
- Red Indicator: Command to EBV close has been initiated either by the PCM or the E-Brake Module.
- Green LED: Positive signal from the throttle pedal has been initiated.



Access Panel (Auto Transmission Trucks Only)

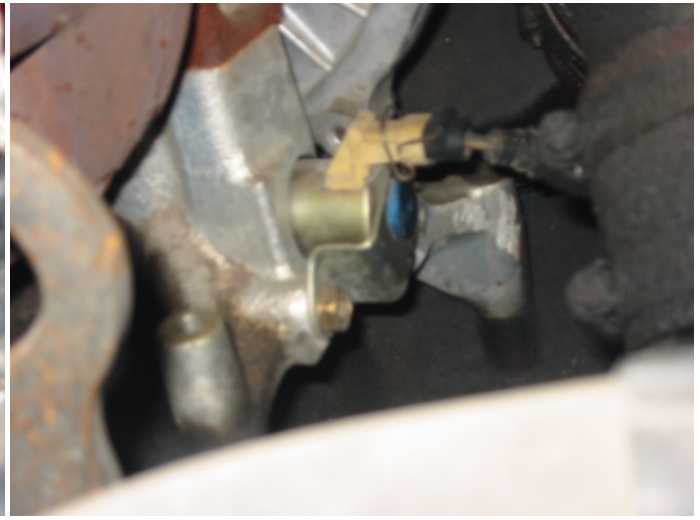

EBPV Connector (Passenger side view, behind Turbo up-pipe)



Ground location (Bolt)



Brake Pedal Green Wire Tapped (Optional)

**Note: The Ignition (+12V) red wire can be connected to the Brake pedal wire switch green wire. This option allows the module to only work when the Brake is applied and the Throttle pedal is off.**

**Questions:** Send email to [Support@dfuser.com](mailto:Support@dfuser.com)  
**Technical Support:** (512) 750-7102  
**dfuser.com**  
**108 Evergreen Road**  
**Georgetown, TX 78628-9500**

**THIS IS A HIGH PERFORMANCE PRODUCT. USE AT YOUR OWN RISK.**

Do not use this product until you have carefully read the following agreement.

This sets forth the terms and conditions for the use of this product. The installation of this product indicates that the BUYER has read and understands this agreement and accepts its terms and conditions

**DISCLAIMER OF LIABILITY**

Dfuser.com and its distributors, jobbers, and dealers (hereafter **SELLER**) shall in no way be responsible for the product's proper use and service. **THE BUYER HEREBY WAIVES ALL LIABILITY CLAIMS.**

The **BUYER** acknowledges that he/she is not relying on the **SELLER's** skill or judgment to select or furnish goods suitable for any particular purpose and that there are no liabilities which extend beyond the description on the face hereof and the **BUYER** hereby waives all remedies or liabilities, expressed or implied, arising by law or otherwise, (including without any obligations of the **SELLER** with respect to fitness, merchantability and consequential damages) or whether or not occasional by the **SELLERS's** negligence.

The **BUYER** is responsible to fully understand the capability and limitations of his/her vehicle according to manufacturer specifications and agrees to hold the **SELLER** harmless from any damage resulting from failure to adhere to such specifications.

The **SELLER** disclaims any warranty and expressly disclaims any liability for personal injury or damages. The **BUYER** acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the **BUYER** agrees to indemnify the **SELLER** and to hold the **SELLER** harmless from any claim related to the item of the equipment purchased. Under no circumstances will the **SELLER** be liable for any damages or expenses by reason of use or sale of any such equipment.

The **BUYER** is responsible to obey all applicable federal, state, and local laws, statutes, and ordinances when operating his/her vehicle, and the **BUYER** agrees to hold **SELLER** harmless from any violation thereof.

The **SELLER** assumes no liability regarding the improper installation or misapplication of its products. It is the installer's responsibility to check for proper installation and if in doubt, contact the manufacturer.

The **SELLER** recommends that the **BUYER** temporarily remove this product from his/her vehicle when having the vehicle serviced by a dealership or other service facility. Failure to do so may cause erroneous diagnostic readings or misdiagnosis of vehicle problems. The **SELLER** assumes no liability for failure to do so.

**LIMITATION OF WARRANTY**

Dfuser.com (hereafter "**SELLER**") gives Limited Warranty as to description, quality, merchantability, fitness for any product's purpose, productiveness, or any other matter of **SELLER's** product sold herewith. The **SELLER** shall be in no way responsible for the product's open use and service and the **BUYER** hereby waives all rights other than those expressly written herein. This Warranty shall not be extended or varied except by a written instrument signed by **SELLER** and **BUYER**.

The Warranty is Limited to ninety (90) days from the date of sale and limited solely to the parts contained within the product's kit. All products that are in question of Warranty must be returned shipping prepaid to the **SELLER** and must be accompanied by a dated proof of purchase receipt. All Warranty claims are subject to approval by Dfuser.com.

Under no circumstances shall the **SELLER** be liable for any labor charged or travel time incurred in diagnosis for defects, removal, or reinstallation of this product, or any other contingent expenses.

Under no circumstances will the **SELLER** be liable for any damage or expenses insured by reason of the use or sale of any such equipment.

**IN THE EVENT THAT THE BUYER DOES NOT AGREE WITH THIS AGREEMENT: THE BUYER MAY PROMPTLY RETURN THIS PRODUCT, IN A NEW AND UNUSED CONDITION, WITH A DATED PROOF OF PURCHASE, TO THE PLACE OF PURCHASE WITHIN TEN (10) DAYS FROM DATE OF PURCHASE FOR A FULL REFUND.**

**THE INSTALLATION OF THIS PRODUCT INDICATES THAT THE BUYER HAS READ AND UNDERSTANDS THIS AGREEMENT AND ACCEPTS ITS TERMS AND CONDITIONS.**

**AFTERMARKET PRODUCTS AND YOUR VEHICLE'S WARRANTY**

Many of our customers ask, "Will your product void my vehicle manufacturer's warranty?" While the answer is straightforward from a legal standpoint, we also want to educate our customers (and aftermarket Consumers) on some industry realities and offer some common sense precautions to minimize your risk.

Consumers of aftermarket products are protected by The Federal Magnusson-Moss Warranty Act. The Act states that if something breaks on your car and you take it in for warranty repair, the dealer must honor your warranty unless they can prove that whatever modifications you have added to your car actually caused the problem.

While as a consumer, you have strong legal protection with regards to your vehicle's warranty, there is also a practical reality that different automotive manufacturers and dealers have greatly varying views on aftermarket products, in particular those that produce horsepower, such as performance enhancement chips, modified intake manifolds, or aftermarket exhaust systems. There are dealers and manufacturers out there that will use the presence of a horsepower upgrade to void your vehicle's warranty. They will do this regardless of whose product you are using. Any aftermarket company that does not acknowledge this is misleading you.

The bottom line is that while the law protects the consumer and provides for enforcement of the warranty, it is very difficult for most people to hire an attorney and fight a voided warranty. Dfuser.com recommends that you always disconnect and remove your module and monitor when you take your vehicle to a dealer for warranty work in order not to interfere with Diagnostic equipment.